



## +64 27 570 9448 sales@bifoldsystems.co.nz www.bifoldsystems.co.nz *Reinvented - simply brilliant!*

## OVERVIEW BI-FOLD DOOR SYSTEM **v**


- 1/ STANDARD HEADER / REBATED ALUMINIUM GUIDE CHANNEL
- 2/ GUIDE WHEEL REBATED INTO TOP EDGE OF LEADING DOOR
- 3/ STANDARD DOOR JAMBS
- 4/ MAGNETIC DOOR CLOSURES
- 5/ STANDARD BUTT RADIUS HINGES 90 x 60mm
- 6/ BI-FOLD PAT. PEND. RADIUS HINGES **90 x 60mm**
- 7/ HINGED DOOR
- 8/ LEADING DOOR
- 9/ STANDARD DOOR STOPS
- 10/ PREFERRED POSITION FOR DOOR HANDLE FIXED TO LEADING DOOR 60mm FROM LEADING EDGE
- 11/ CLOSING BEVELS

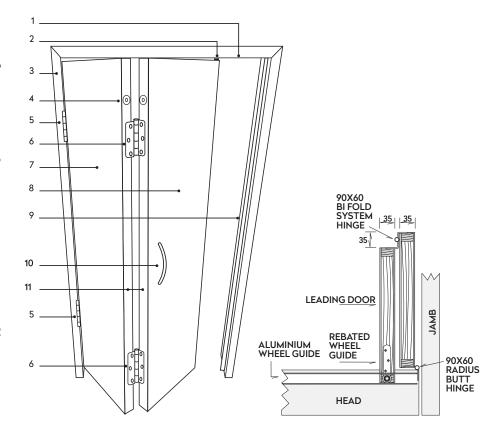



## BI-FOLD DOOR SYSTEM COMPONENTS V

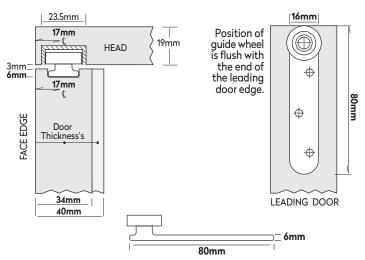

Routing of the guide wheel is **80mm** length, **16mm** width, **6mm** depth. On **34mm** & **40mm** door thickness's, centre for the guide wheel is **17mm** from the leading door face edge.







Leading door edge **Right Side** opening **Remove & invert** hinge pin